




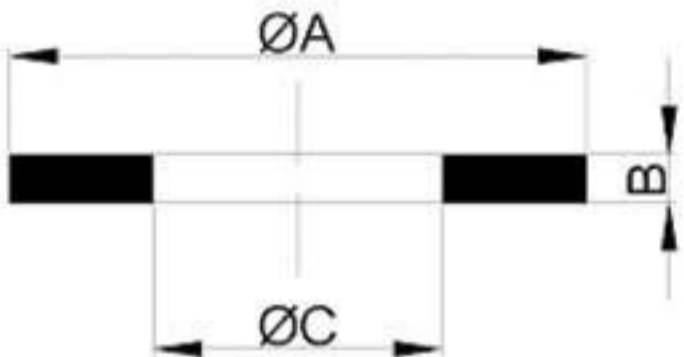



**SEALING, HYDRAULIC, PNEUMATIC  
AND ROTATORY SEALS CATALOGUE.**





**CAUCHO SEALS**



TYPE	PROFILE	MATERIAL	PRESSURE	TEMPERATURE
O-Ring		NBR / EPDM / FKM / VMQ / CR / HNBR / EPDM PEROX	-	-
Quad-Ring		NBR 70Sh FKM 70Sh EPDM 70Sh	-	-20... +100 °C -20... +200 °C -50... +130 °C
Back Up Ring		NBR 90Sh	-	-20... +100 °C
O-Ring Cord		NBR 70Sh FKM 70Sh VMQ 60Sh EPDM 70Sh	-	-20... +100 °C -20... +200 °C -60... +180 °C -50... +130 °C
Encapsulated O-Ring		FKM + FEP VMQ + FEP	-	-20... +205 °C -60... +180 °C
Plain Ring / Flat Washer		NBR / EPDM FKM / VMQ	-	-
Metal-Buna		NBR / FKM STEEL / INOX	≤ 1000 BAR	-20... +100 °C -20... +200 °C



# PISTON SEALS




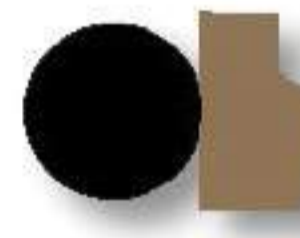



TYPE	PROFILE	MATERIAL	PRESSURE	TEMPERATURE
JP5		NBR + POLYESTER + PA / GLASS FIBER	70 BAR	-30... +100 °C
JP3		NBR / NBR + TEXTILE + PA / GLASS FIBER	40 BAR	-30... +100 °C

				
G29	PDE	G11	GT3	PS1















TYPE	PROFILE	MATERIAL	PRESSURE	TEMPERATURE
BAL		NBR / NBR + TEXTILE FKM / FPM + TEXTILE	30 BAR	-30... +100 °C -30... +200 °C
BAL+		NBR / NBR+TEXTILE+POM FKM / FKM+TEXTILE+POM	40 BAR	-30... +100 °C -30... +200 °C

						
GT5	PSE	G10	RS1	U3	U4	U5













## POLYURETHANE U - SEALS

TYPE	PROFILE	MATERIAL	PRESSURE	TEMPERATURE
UU		POLYURETHANE 90Sh - 95Sh	40 BAR	-30... +100 °C
U1		POLYURETHANE 90Sh - 95Sh	40 BAR	-30... +100 °C
U2		POLYURETHANE 90Sh - 95Sh	40 BAR	-30... +100 °C
U7		POLYURETHANE 90Sh - 95Sh	40 BAR	-30... +100 °C



## WHIPERS

TYPE	PROFILE	MATERIAL	PRESSURE	TEMPERATURE
RCM		NBR 90Sh + METAL FKM 90SH + METAL	-	-30... +100 °C -20... +200 °C
RP2E		POLYURETHANE 90Sh	-	-20... +100 °C
RC2E		NBR 90Sh	-	-20... +100 °C
RPM2E		POLYURETHANE 90Sh + METAL	-	-20... +100 °C
RPMI		POLYURETHANE 90Sh + METAL	-	-20... +100 °C
RPM		POLYURETHANE 90Sh + METAL	-	-20... +100 °C




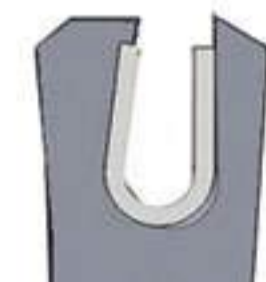






TYPE	PROFILE	MATERIAL	PRESSURE	TEMPERATURE
RC		NBR FKM	≤ 0,50 BAR	-20... +100 °C -20... +200 °C
RCSIN		NBR	-	-20... +100 °C
RCL		NBR FKM	≤ 0,50 BAR	-20... +100 °C -20... +200 °C
RM		NBR	≤ 0,50 BAR	-20... +100 °C
RML		NBR	≤ 0,50 BAR	-20... +100 °C
BLIN		NBR	≤ 0,50 BAR	-20... +100 °C
BLIN/L		NBR	≤ 0,50 BAR	-20... +100 °C
BABSL		NBR FKM	≤ 10 BAR	-20... +100 °C -20... +200 °C
TN		PTFE + INOX PTFE / GLASS + INOX	≤ 25 BAR	-90... +250 °C
VA		NBR FKM	-	-20... +100 °C -20... +200 °C
VS		NBR FKM	-	-20... +100 °C -20... +200 °C
VL		NBR FKM	-	-20... +100 °C -20... +200 °C



TYPE	PROFILE	MATERIAL	PRESSURE	TEMPERATURE
GR2		-	-	-
GR1		-	-	-

## PNEUMATIC + SPECIAL SEALS + CUSTOM PRODUCTION

 PPN	 PPN+	 WRM	 M44
 UM	 K22	 RB	 RB9





# CAUCHOSEALS

RUBBER · SEALING · HYDRAULIC

CAUCHOSEALS is a Company whose aim is to supply all kind of injected and extruded rubber parts as well as sealing and hydraulic gaskets, in order to satisfy all of our customers' needs.

Both our own production and the commercialization of different parts from the best Spanish and European suppliers, specialised in a certain product, allow us to offer competitive prices and high quality parts.

A long decade's dedication makes us expert in sealing and rubber products. We also provide technical support to our customers, in order to choose the best part and material for each use.

We offer a wide product range going from standard to special rubber compounds. Some of them are developed according to technical specifications or valid for alimentary use. Among them we have: NBR, EPDM, CR (Chloroprene), NR (Natural Rubber), VMQ (Silicone), SBR, HNBR, FKM (Viton). They are available in many different colours: black, red, white, blue, yellow...

## 1 INJECTED RUBBER

Production of injected rubber technical parts

## 2 EXTRUDED RUBBER

Extruded rubber profiles, cords and tubes

## 3 SEALING GASKETS

O-rings, Plain Rings, X-rings, Encapsulated, Back up Rings, Bonded Seals

## 4 HYDRAULIC SEALS

Rod and U Seals, Piston Seals, Wipers, Rotary Oil Seals, V-Rings



Injected rubber



Extruded rubber



Plain Rings



Hydraulic seals

FIND US



CAUCHOSEALS

C/ MARIANO BENLLIURE, 6 - 6 - P2C 41005 SEVILLA

MOBILE: 661 631 756 - TELEPHONE: 955 10 11 52 / INFO@cauchoseals.es

SABINO GÓMEZ

ENQUIRIES



MOBILE: +34 661 631 756 / TELEPHONE: +34 955 101 152

INFO@cauchoseals.es